

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
6 October 2005 (06.10.2005)

PCT

(10) International Publication Number  
**WO 2005/091698 A2**

(51) International Patent Classification: Not classified

(21) International Application Number:  
PCT/EP2004/003197

(22) International Filing Date: 26 March 2004 (26.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicants (for all designated States except US): **AB SKF** [SE/SE]; Hornsgatan 1, S-415 50 Göteborg (SE). **CON-TITECH LUFTFEDERSYSTEME GMBH** [DE/DE]; Vahrenwalder Str. 9, 30165 Hannover (DE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GEDENK, Volker** [DE/DE]; Pastorenkamp 13, 30966 Hemmingen (DE). **HOPPMANN, Friedrich** [DE/DE]; Orffstrasse 18, 30966 Hemmingen (DE). **SCHMIECHEN, Rolf** [DE/DE]; Am Kammerholz 3, 97525 Schwebheim (DE). **SKILLER, John** [NL/NL]; Koperwiek 6, NL-3766 AK Soest (NL).

(74) Agent: **KOHL, Thomas**; SKF GmbH, Patentabteilung, Gunnar-Wester-Strasse 12, 97421 Schweinfurt (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: RAILWAY BOGIE

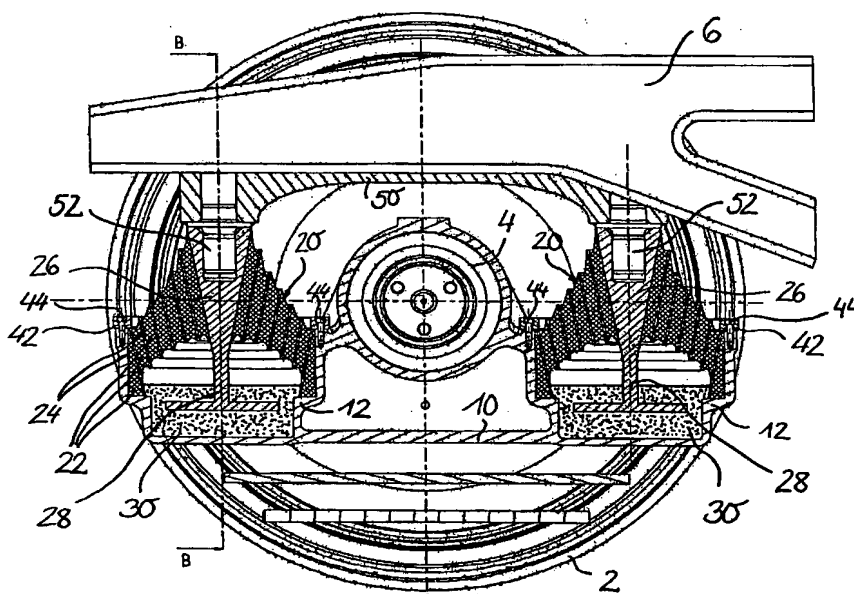

(57) Abstract: A railway bogie comprising at least one hydraulic spring having a housing being required for a functionality of said hydraulic spring and an axlebox is characterized by the fact that at least a part of said axlebox forms at least a part of said housing.

Best Available Copy

WO 2005/091698 A2